

BAKERS FORKLIFT SERVICES LTD T/A
BFS FORKS & ATTACHMENTS
2 HAINGE ROAD, TIVIDALE, OLDBURY, B69 2NH
TEL: 0121 557 1935 FAX: 0121 557 4245
E MAIL: SALES@BFSLTD.CO.UK

MANUTEL G2 TELESCOPIC FORKS
STANDARD EDITION




The manual telescopic fork with well-ried pin locking.

Advantages:

- Very simple to fit and operate
- Extension length is always within legal maximum length permitted
- Simple locking by a removable locking pin
- Standard Manutel have retracted and extended positions, up to three additional length positions available as optional extras
- Robust construction, suitable for indoor use and occasional outdoor use
- Tried and tested for years in many industries
- Very simple to maintain
- Complete with operating instructions



Dimensions ManuTel G2® Standard Edition

Type ManuTel Part No	Lifting capacity at CG	Length (retracted) L 0	Length (extended) L 1	Cross-section (outside)	Weight total FEM A/B	Centre of gravity X-Axis retracted FEM A/B	Centre of gravity X-Axis extended FEM A/B	Suspension Type
	kg/mm	mm	mm	mm	kg	mm	mm	
MTGZ16/8/12	1600/500	800	1200	115x50	45/47	263/252	356/341	FEM 2A/B
MTGZ16/10/16	1600/500	1000	1600	115x50	53/55	353/340	503/485	FEM 2A/B
MTGZ16/12/18	1600/500	1200	1800	115x50	62/64	448/434	605/586	FEM 2A/B
MTGZ16/12/20	1600/500	1200	2000	115x50	62/64	446/432	656/635	FEM 2A/B
MTGZ25/8/12	2500/500	800	1200	135x55	60/63	262/251	344/330	FEM 2A/B
MTGZ25/10/16	2500/500	1000	1600	135x55	71/74	352/339	485/467	FEM 2A/B
MTGZ25/12/18	2500/500	1200	1800	135x55	82/85	446/431	585/566	FEM 2A/B
MTGZ25/12/20	2500/500	1200	2000	135x55	82/85	444/430	630/610	FEM 2A/B
MTGZ25/14/24	2500/500	1400	2400	135x55	92/95	538/523	779/757	FEM 2A/B
MTGZ35/8/12	3500/500	800	1200	140x60	75/80	243/228	314/294	FEM 3A/B
MTGZ35/10/16	3500/500	1000	1600	140x60	87/92	330/311	444/419	FEM 3A/B
MTGZ35/12/18	3500/500	1200	1800	140x60	100/105	421/400	542/515	FEM 3A/B
MTGZ35/12/20	3500/500	1200	2000	140x60	100/105	420/398	581/552	FEM 3A/B
MTGZ35/14/24	3500/500	1400	2400	140x60	112/117	511/488	722/689	FEM 3A/B
MTGZ50/8/12	5000/500	800	1200	165 X 65	97/104	246/231	310/290	FEM 3A/B
MTGZ50/10/16	5000/500	1000	1600	165x65	113/120	332/314	436/411	FEM 3A/B
MTGZ50/12/18	5000/500	1200	1800	165X65	128/136	423/401	532/505	FEM 3A/B
MTGZ50/12/20	5000/500	1200	2000	165X65	128/136	422/400	569/539	FEM 3A/B
MTGZ50/14/24	5000/500	1400	2400	165X65	144/151	514/490	705/672	FEM 3A/B
MTGZ50-6/08/12/A	5000/600	800	1200	165X65	110	220	275	FEM4A
MTGZ50-6/10/16	5000/600	1000	1600	165X65	126	300	392	FEM 4A
MTGZ50-6/12/18	5000/600	1200	1800	165X65	141.5	385	485	FEM 4A
MTGZ50-6/12/20	5000/600	1200	2000	165X65	141.5	385	525	FEM 4A
MTGZ50-6/14/24	5000/600	1400	2400	165X65	157	472	648	FEM 4A

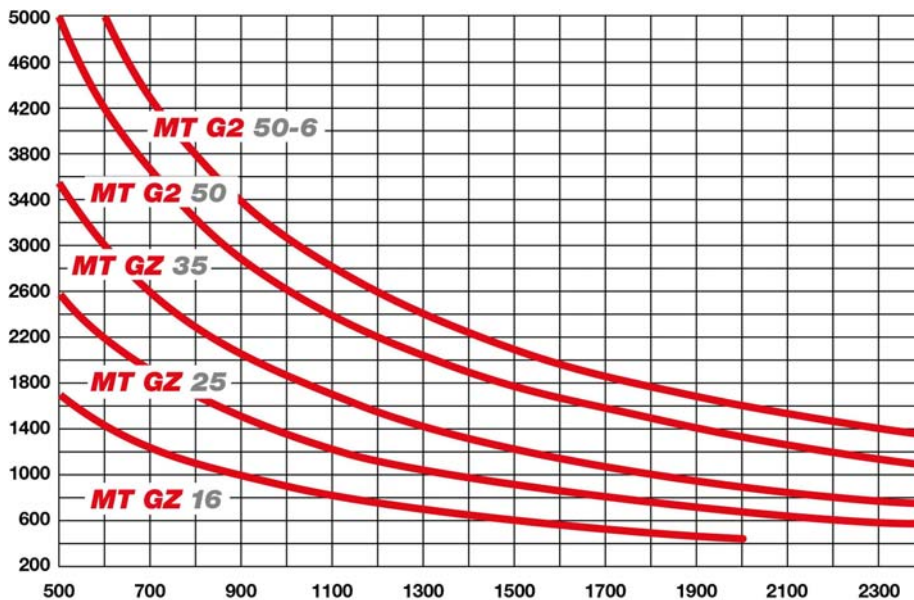

NEW FOR 2008!

MANUTEL SLIMLINE EDITION

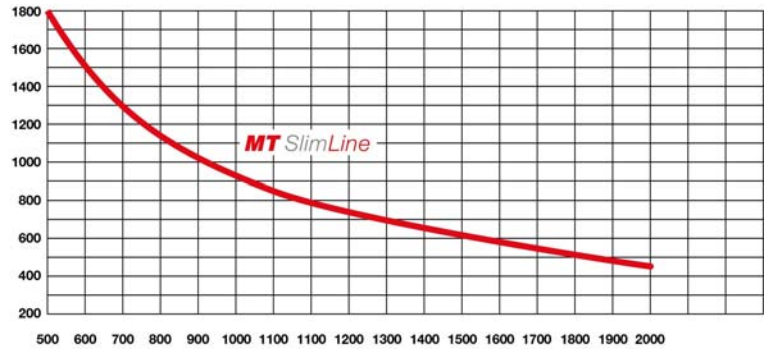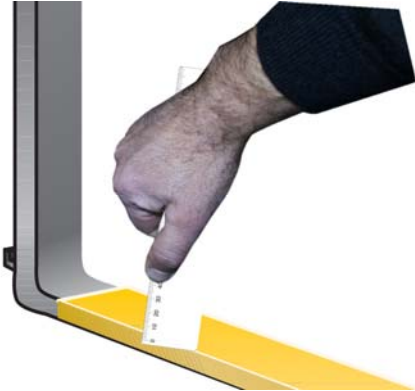

- Only 40 mm thick
- Easy to fit
- Patented bolt locking
-

Dimensions ManuTel Slimline

Type Manutel Part No	Capacity per pair at LC (kg/mm)	Length (retracted) LO (mm)	Length (extended) L1 (mm)	Cross Section Outside (mm)	Weight Total FEM A/B (kg)	Centre of Gravity X-Axis Retracted FEM A/B (mm)	Centre of Gravity X-Axis Extended FEM A/B (mm)	Suspension
MTSL 20/08/12	2000/500	800	1200	143 x 40	51/54	239/228	302/288	FEM 2A/B
MTSL 20/10/16	2000/500	1000	1600	143 x 40	59/62	328/313	427/410	FEM 2A/B
MTSL 20/12/18	2000/500	1200	1800	143 x 40	67/70	416/401	523/405	FEM 2A/B
MTSL 18/12/20	1800/500	1200	2000	143 x 40	67/70	416/401	558/538	FEM 2A/B