


**BAKERS FORKLIFT SERVICES LTD T/A
BFS FORKS & ATTACHMENTS**
2 HAINGE ROAD, TIVIDALE, OLDBURY, B69 2NH
TEL: 0121 557 1935 FAX: 0121 557 4245
E MAIL: SALES@BFSLTD.CO.UK

FIXED CRANE HOOKS

BFS crane hooks effectively transform a forklift into a mobile crane, handle awkward loads which cannot be safely handled by a conventional forklift with great efficiency. They have excellent strength:weight ratios. All crane hooks are supplied complete with safety swivel hook and shackle.

“PB” denotes plain bearing hook

“BB” denotes ball bearing hook (for easier load rotation)

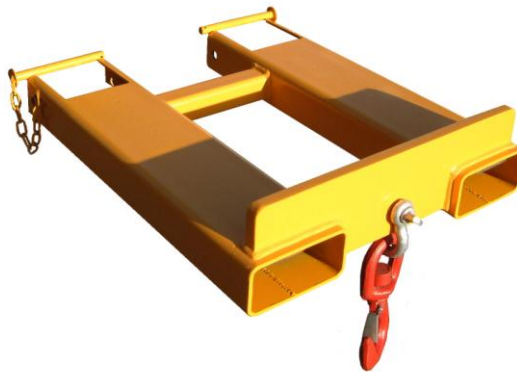

The model to choose when lifting on or near the taper or tip of the forks. The table below indicates the most popular models, with the hook fixed at 750 mm load centres from the fork upright face. However, we can build to order practically any size and capacity.

Model	SWL Kgs At 750 mm Load Centres	Max Fork Section W X T Mm	Minimum Gap Required between Forks Mm	Weight Kgs
FCH 1.0 PB	1000	150 x 60	240	51
FCH 2.0 PB	2000	150 x 60	240	52
FCH 3.0 PB	3000	150 X 60	240	53
FCH 1.25 BB	1250	150 X 60	240	50
FCH 1.6 BB	1600	150 X 60	240	51
FCH 2.5 BB	2500	150 X 60	240	52
FCH 3.2 BB	3200	150 X 60	240	53

**DESIGN, MANUFACTURE, REPAIR, MPI CRACK TEST AND PROOF LOAD TEST
FORKLIFT FORKS & ATTACHMENTS
STANDARD ATTACHMENT RANGE INCLUDES:
EXTENSION SLEEVES, SAFE ACCESS PLATFORMS, DRUM CLAMPS,
JIBS, LONG REACH SCOOPS, ROLL FORWARD SKIPS, CARPET/COIL BOOMS**